

# Databases and Relations

•**Solution:** The resulting relation is:

- $\{(1978, \text{Ackermann}, 231455, \text{CS}, 3.88),$   
 $(1972, \text{Adams}, 888323, \text{Physics}, 3.45),$   
 $(1917, \text{Chou}, 102147, \text{CS}, 3.79),$   
 $(1984, \text{Goodfriend}, 453876, \text{Math}, 3.45),$   
 $(1982, \text{Rao}, 678543, \text{Math}, 3.90),$   
 $(1970, \text{Stevens}, 786576, \text{Psych}, 2.99)\}$
- Since  $Y$  has two fields and  $R$  has four, the relation  $J_1(Y, R)$  has  $2 + 4 - 1 = 5$  fields.

# Representing Relations

- We already know different ways of representing relations. We will now take a closer look at two ways of representation: **Zero-one matrices** and **directed graphs**.
- If  $R$  is a relation from  $A = \{a_1, a_2, \dots, a_m\}$  to  $B = \{b_1, b_2, \dots, b_n\}$ , then  $R$  can be represented by the zero-one matrix  $M_R = [m_{ij}]$  with
  - $m_{ij} = 1$ , if  $(a_i, b_j) \in R$ , and
  - $m_{ij} = 0$ , if  $(a_i, b_j) \notin R$ .
- Note that for creating this matrix we first need to list the elements in  $A$  and  $B$  in a **particular, but arbitrary order**.

# Representing Relations

•**Example:** How can we represent the relation  $R = \{(2, 1), (3, 1), (3, 2)\}$  as a zero-one matrix?

•**Solution:** The matrix  $M_R$  is given by

$$M_R = \begin{bmatrix} 0 & 0 \\ 1 & 0 \\ 1 & 1 \end{bmatrix}$$

# Representing Relations

- What do we know about the matrices representing a **relation on a set** (a relation from A to A) ?
- They are **square** matrices.
- What do we know about matrices representing **reflexive** relations?
- All the elements on the **diagonal** of such matrices  $M_{ref}$  must be **1s**.

$$M_{ref} = \begin{bmatrix} 1 & & & & \\ & 1 & & & \\ & & \cdot & & \\ & & & \cdot & \\ & & & & \cdot \\ & & & & & 1 \end{bmatrix}$$

# Representing Relations

- What do we know about the matrices representing **symmetric relations**?
- These matrices are symmetric, that is,  $M_R = (M_R)^t$ .

$$M_R = \begin{bmatrix} 1 & 0 & 1 & 1 \\ 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 \\ 1 & 0 & 1 & 1 \end{bmatrix}$$

symmetric matrix,  
symmetric relation.

$$M_R = \begin{bmatrix} 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \end{bmatrix}$$

non-symmetric matrix,  
non-symmetric relation.

# Representing Relations

- The Boolean operations **join** and **meet** (you remember?) can be used to determine the matrices representing the **union** and the **intersection** of two relations, respectively.
- To obtain the **join** of two zero-one matrices, we apply the Boolean “or” function to all corresponding elements in the matrices.
- To obtain the **meet** of two zero-one matrices, we apply the Boolean “and” function to all corresponding elements in the matrices.

# Representing Relations

•**Example:** Let the relations R and S be represented by the matrices

$$M_R = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} \quad M_S = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 1 \\ 1 & 0 & 0 \end{bmatrix}$$

What are the matrices representing  $R \cup S$  and  $R \cap S$ ?

**Solution:** These matrices are given by

$$M_{R \cup S} = M_R \vee M_S = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 0 \end{bmatrix} \quad M_{R \cap S} = M_R \wedge M_S = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

# Representing Relations Using Matrices

•**Example:** How can we represent the relation  $R = \{(2, 1), (3, 1), (3, 2)\}$  as a zero-one matrix?

•**Solution:** The matrix  $M_R$  is given by

$$M_R = \begin{bmatrix} 0 & 0 \\ 1 & 0 \\ 1 & 1 \end{bmatrix}$$



# Representing Relations Using Matrices

•**Example:** Let the relations R and S be represented by the matrices

$$M_R = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} \quad M_S = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 1 \\ 1 & 0 & 0 \end{bmatrix}$$

What are the matrices representing  $R \cup S$  and  $R \cap S$ ?

**Solution:** These matrices are given by

$$M_{R \cup S} = M_R \vee M_S = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 0 \end{bmatrix} \quad M_{R \cap S} = M_R \wedge M_S = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

# Representing Relations Using Matrices

Do you remember the **Boolean product** of two zero-one matrices?

Let  $A = [a_{ij}]$  be an  $m \times k$  zero-one matrix and  $B = [b_{ij}]$  be a  $k \times n$  zero-one matrix.

Then the **Boolean product** of  $A$  and  $B$ , denoted by  $A \circ B$ , is the  $m \times n$  matrix with  $(i, j)$ th entry  $[c_{ij}]$ , where

$$c_{ij} = (a_{i1} \wedge b_{1j}) \vee (a_{i2} \wedge b_{2j}) \vee \dots \vee (a_{ik} \wedge b_{kj}).$$

$c_{ij} = 1$  if and only if at least one of the terms  $(a_{in} \wedge b_{nj}) = 1$  for some  $n$ ; otherwise  $c_{ij} = 0$ .

# Representing Relations Using Matrices

Let us now assume that the zero-one matrices

$M_A = [a_{ij}]$ ,  $M_B = [b_{ij}]$  and  $M_C = [c_{ij}]$  represent relations A, B, and C, respectively.

**Remember:** For  $M_C = M_A \circ M_B$  we have:

$c_{ij} = 1$  if and only if at least one of the terms  
 $(a_{in} \wedge b_{nj}) = 1$  for some  $n$ ; otherwise  $c_{ij} = 0$ .

In terms of the **relations**, this means that C contains a pair  $(x_i, z_j)$  if and only if there is an element  $y_n$  such that  $(x_i, y_n)$  is in relation A and  $(y_n, z_j)$  is in relation B.

Therefore,  $C = B \circ A$  (**composite** of A and B).

# Representing Relations Using Matrices

This gives us the following rule:

$$M_{B \circ A} = M_A \circ M_B$$

In other words, the matrix representing the **composite** of relations A and B is the **Boolean product** of the matrices representing A and B.

Analogously, we can find matrices representing the **powers of relations**:

$$M_{R^n} = M_R^{[n]} \quad (\text{n-th Boolean power}).$$

# Representing Relations Using Matrices

• **Example:** Find the matrix representing  $R^2$ , where the matrix representing  $R$  is given by

$$M_R = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 1 & 1 \\ 1 & 0 & 0 \end{bmatrix}$$

**Solution:** The matrix for  $R^2$  is given by


$$M_{R^2} = M_R^{[2]} = \begin{bmatrix} 0 & 1 & 1 \\ 1 & 1 & 1 \\ 0 & 1 & 0 \end{bmatrix}$$

# Representing Relations Using Digraphs

- **Definition:** A **directed graph**, or **digraph**, consists of a set  $V$  of **vertices** (or **nodes**) together with a set  $E$  of ordered pairs of elements of  $V$  called **edges** (or **arcs**).
- The vertex  $a$  is called the **initial vertex** of the edge  $(a, b)$ , and the vertex  $b$  is called the **terminal vertex** of this edge.
- We can use arrows to display graphs.

# Representing Relations Using Digraphs

- **Example:** Display the digraph with  $V = \{a, b, c, d\}$ ,  
 $E = \{(a, b), (a, d), (b, b), (b, d), (c, a), (c, b), (d, b)\}$ .

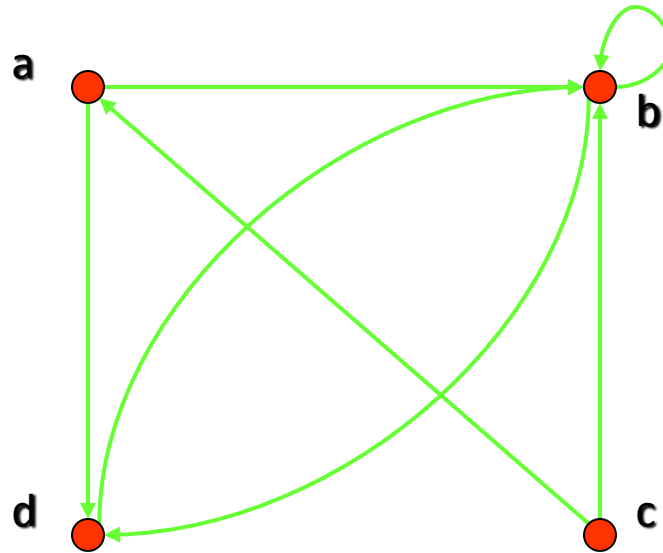

An edge of the form  $(b, b)$  is called a **loop**.